


# technical information

## plastics and their operating temperature

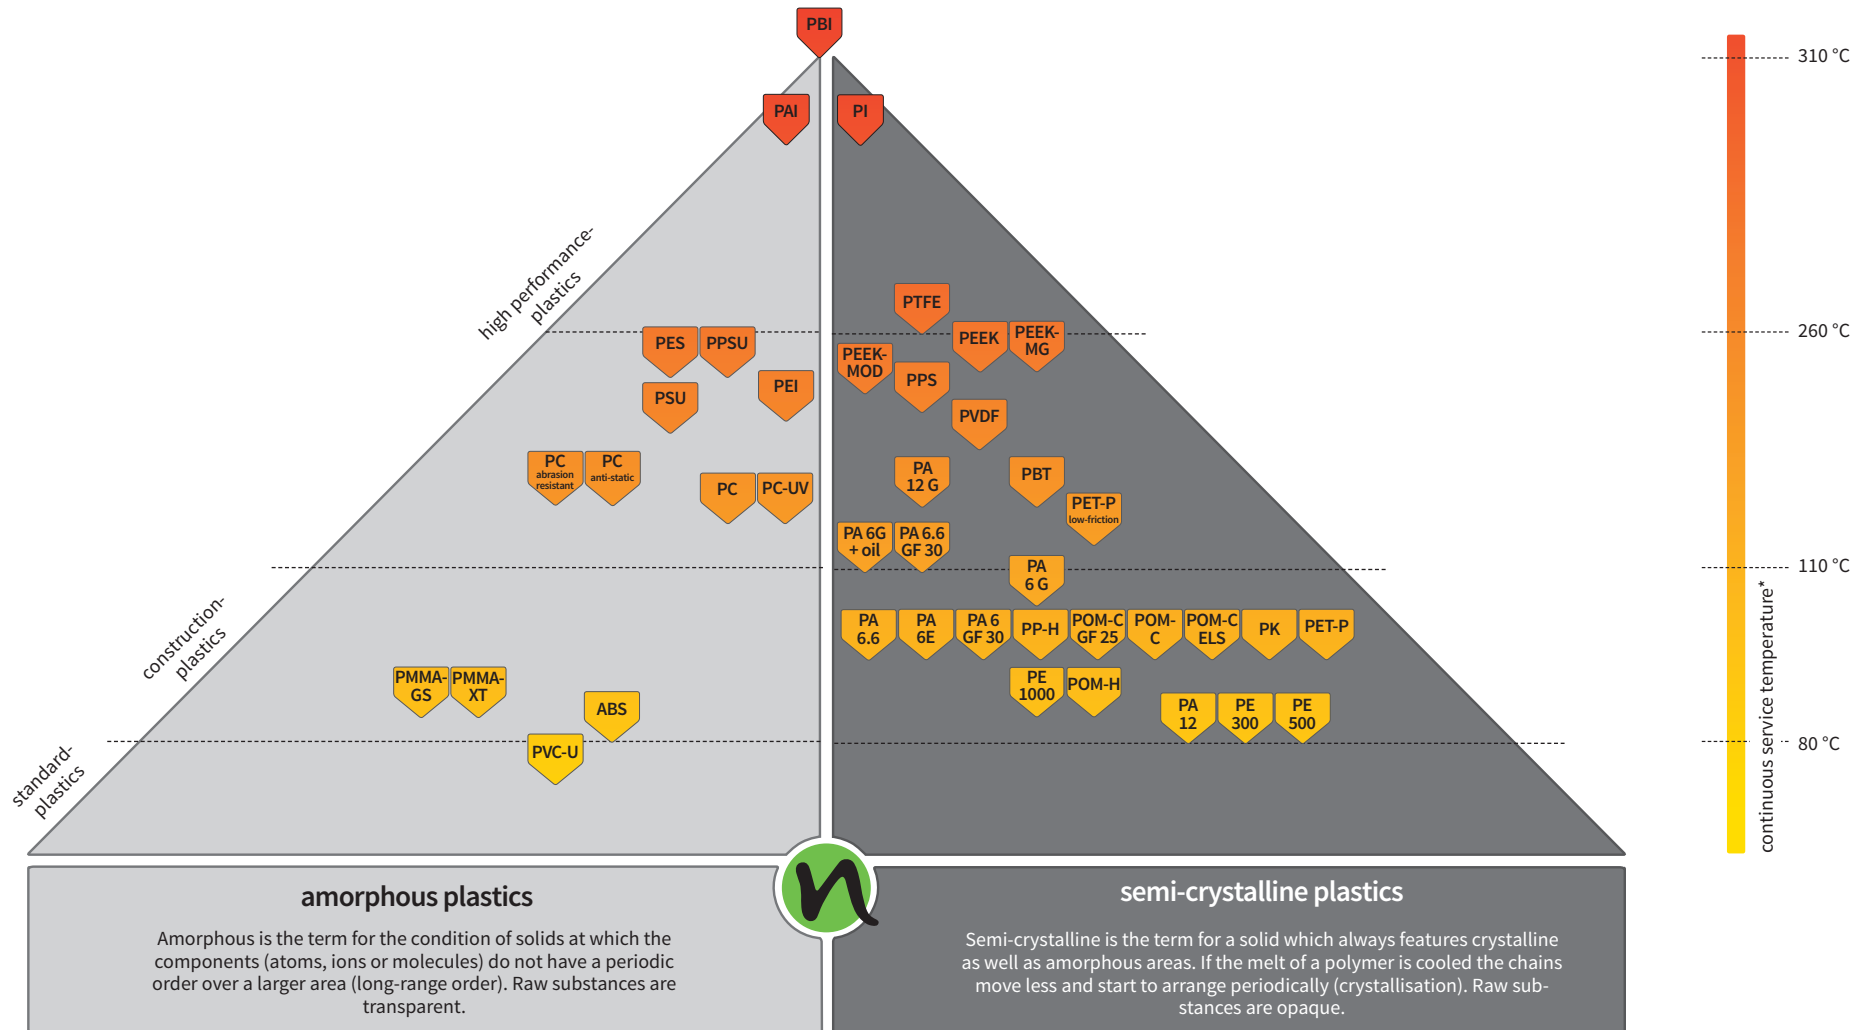

\*operating temperature = max. temperature at which the loss of initial properties of plastics in hot air does not exceed 50 % after 20,000 hours (according to DIN iEC 216)

All information based on current knowledge and experience. Information provided shall not exempt the contractor or user from conducting own tests. A legally binding warranty as to product features or its suitability for specific purposes may not be derived therefrom. Compliance with any proprietary rights as well as existing laws or regulations is the responsibility of the recipient of our products. No liability assumed for printing and any other errors. Technical data subject to change without notice. Reproduction or duplication of this document or its contents - whole or in part - is only permitted with express approval by company noltewerk. The German version of this data shall prevail. As of 0317.



technical plastics